

# VERSALIFT

## VTM-150-F

Van mounted telescopic platform



Mercedes-Benz Sprinter  
(5,000 kg GVW)



FPC controls with up to 4  
actions at a time



Hydraulic axle locking  
system



Emergency lowering  
controls at the pedestal




Knuckle/turret tailswing  
within the mirrors



Outriggers mounted  
below the vehicle

## Available specifications

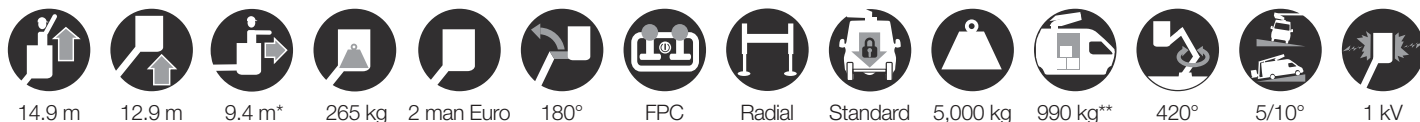

## Dimensions




**Length:** 7,405 mm

**Height:** 3,580 mm

**Wheelbase:** 3,665 mm

## Key features

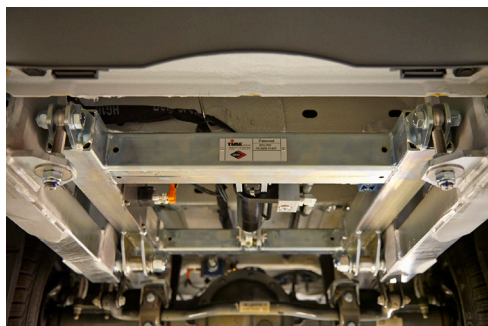

Hydraulic axle locking system



Workshop interior (optional)



Walk-Through-System: Direct access from the cabin to the bucket through the vehicle (optional)



FPC (Full Proportional CANbus controls): Variable outreach (with optional load cell) and up to 4 actions at a time

## Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.

\* Depending on the vehicle.

\*\* Max payload with a driver, a passenger and a full tank of fuel (220 kg added to the installation weight).


\*\*\* Requires the option "Limited working area without outriggers".

\*\*\*\* Reduced outreach and max 230 kg bucket capacity.


## Additional equipment

Workshop interior  
Walk-Through-System  
Inverter  
Tow bar  
GVW upgrade to 5,500 kg  
Reversing camera  
Drive option (drive the vehicle with raised platform)\*\*\*  
Bucket rotator (2 x 90°)\*\*\*\*  
Load cell (Variable load dependant outreach)  
Home function & limited working area without outriggers

## Diagramme(s)

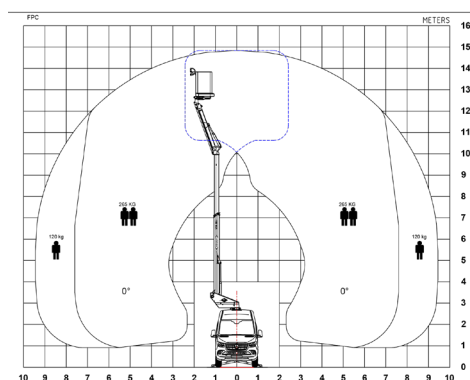

Working envelope

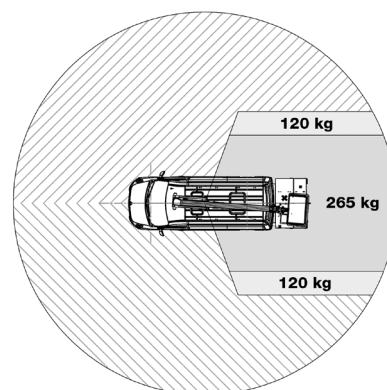

Limited working area without outriggers (optional)

## Distributor

**BRUBAKKEN**

Victor Hasselblads gata 9  
421 31 Västra Frölunda  
Tel vx +46 10 722 30 00  
[www.brubakken.se](http://www.brubakken.se)

V831F (Versalift VTM-41-150-F on Mercedes-Benz Sprinter Van) - revision 2019/04

[www.teamversalift.com](http://www.teamversalift.com)