

# 3710 RJ



[www.ommelift.com](http://www.ommelift.com)

## Crawler lift - Telescopic

Dealers:

**Liftgruppen**


**OMMELIFT**



**Liftgruppen AB**

Victor Hasselblads Gata 9  
Västra Frölunda, 42131, Sweden  
+46 10 722 30 00  
[info@liftgruppen.se](mailto:info@liftgruppen.se)  
[www.liftgruppen.se](http://www.liftgruppen.se)

# 3700 RJ Crawler lift

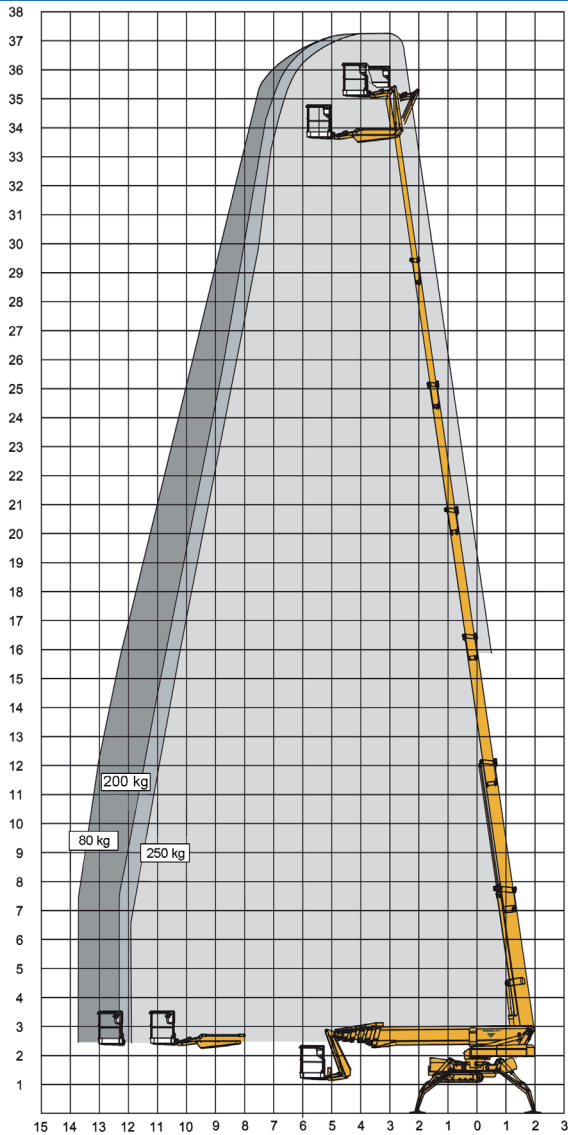

Technical Data:		3710 RBJ	3700 RBDJ
Max. working height		37.0 m	
Max. platform height		35.0 m	
Max. outreach		13.7 m	
Up and over clearance		-	
Angle boom length (boom + basket)		-	
Jib length (jib + basket)		2.7 m	
Vertical jib rotation		130°	
Turret rotation		± 355°	
Basket rotation		± 41°	
Max. basket load		250 kg	
Basket size (detachable)		1.25 x 0.8 x 1.1 m	
Stabilizer pad size		0.28 x 0.44 m	
	€Diesel	<b>BATTERY</b>	€HYBRID
Engine			14kW/18.8hp
Fuel tank capacity			23 l
Generator			24 V / 22 A
Battery pack		24V/400Ah/5h	24V/400Ah/5h
Charger		24 V / 30 A	24 V / 30 A
Double charger system		Standard	Optional
Elec. descent from basket			
<a href="http://www.ommelift.com">See www.ommelift.com for more features and options</a>			
Gradeability, max. across slope		¹Wide 35% (19.3°)	
Gradeability, max. up and down slope		35% (19.3°)	
Set-up ability on uneven ground		30% (16.7°)	
Crawler track length		1.92 m	
¹Undercarriage in Wide    ²Undercarriage in Narrow    ³Wide set-up    ⁴Wide/Narrow set-up			
Total weight		5700 kg	5700 kg
¹Live load in transit position		467 kg/m²	467 kg/m²
²Live load in transit position		560 kg/m²	560 kg/m²
³Live load in working position		260 kg/m²	260 kg/m²
⁴Live load in working position		322 kg/m²	322 kg/m²
Ground pressure, tracks (Hard surface)		0.87 kg/cm² (2.70 kg/cm²)	0.87 kg/cm² (2.70 kg/cm²)
Ground pressure, outrigger pad		2.76 kg/cm²	2.76 kg/cm²
Max. force, outrigger		34.0 kN	34.0 kN

